


PLINTH SIGN - PL1 GATEWAY PLINTH

1101.01

WAYFINDING SIGNAGE DESIGN AND INSTALLATION

REVIEWED: 09.07.2024

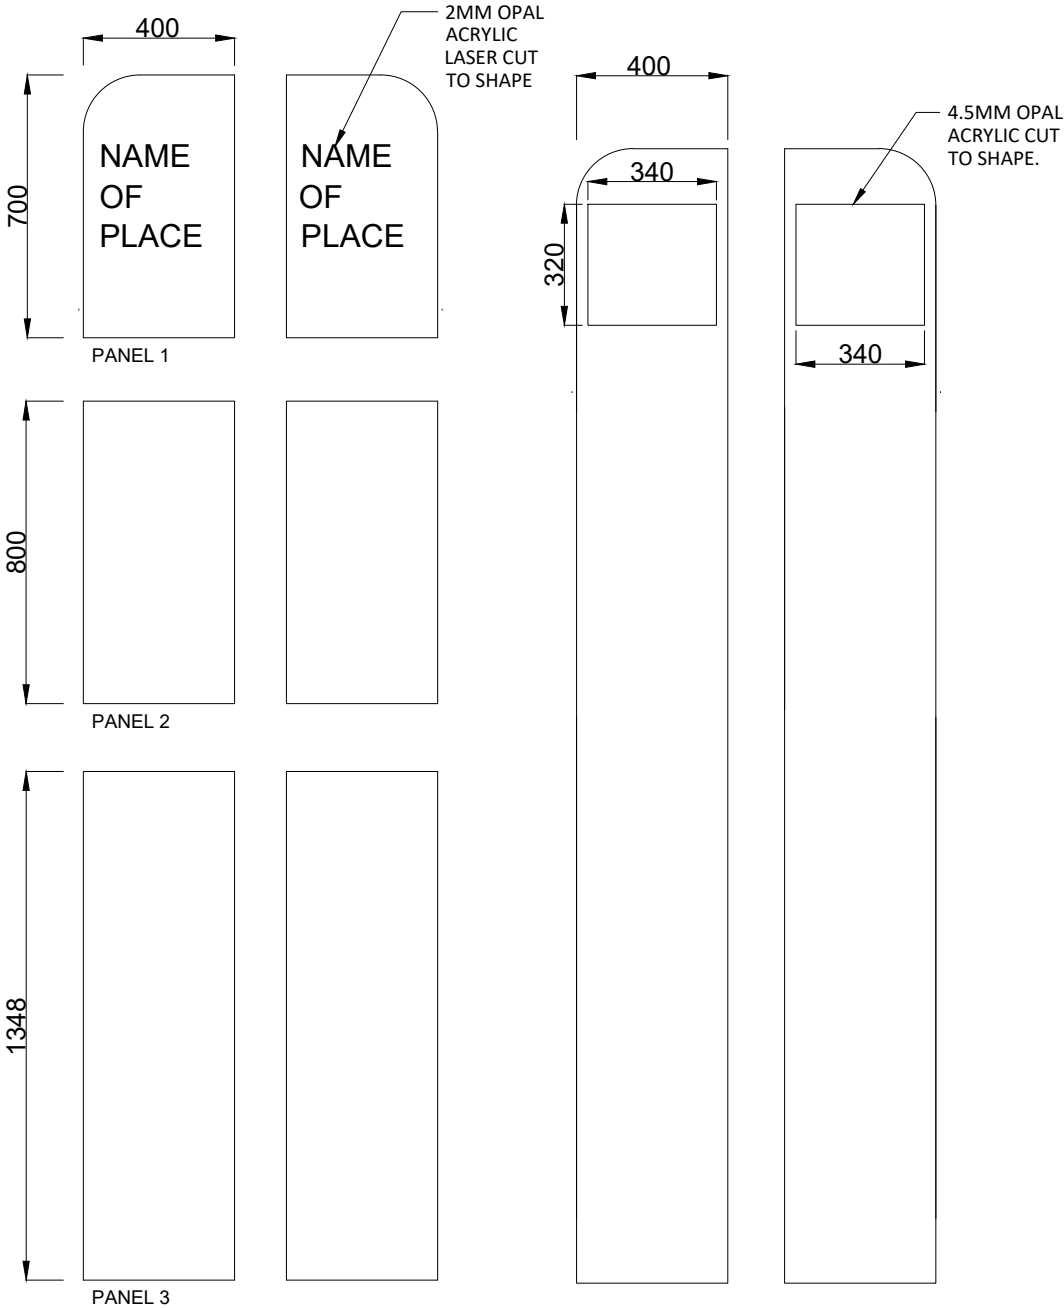

1.6mm THICK ALUMINIUM PANELS
WITH 1.1MM THICK MAGNETIC SHEET ADHERED AT REAR.

3mm GALVANISED BACKING PLATE
WITH 4MM HOLES FOR COUNTERSUNK FIXINGS TO FRAME

CUT PANELS

NOTES

WAYFINDING GRAPHIC SIGNAGE
VINYL PRINT WITH PROTECTIVE MATT CLEAR COATING.
FINAL ARTWORK TO BE PROVIDED BY THE CITY.

SHOP DRAWING
SHOP DRAWINGS MUST BE APPROVED PRIOR TO PROTOTYPE FABRICATION.

MATERIAL
ALL STAINLESS STEEL TO BE GRADE 316 WITH PROTECTIVE COATING AND NO ENVIRONMENTAL CONTAMINATION.

STRUCTURAL ENGINEERING
SIGNAGE FABRICATOR AND/OR INSTALLER IS RESPONSIBLE FOR ALL DRAWINGS BEING STRUCTURALLY CERTIFIED AND SIGNAGE BEING FABRICATED AS PER THE STRUCTURAL ENGINEERS SPECIFICATION.

ALL GROUND SURFACE TREATMENT TO BE MADE GOOD FOLLOWING COMPLETION OF INSTALLED WAYFINDING SIGN.