


TYPICAL FOOTPATH PAVING - BRUSHED CONCRETE PAVING


303.06

FOOTPATH AND PAVEMENT DESIGN

REVIEWED: 07.05.2024

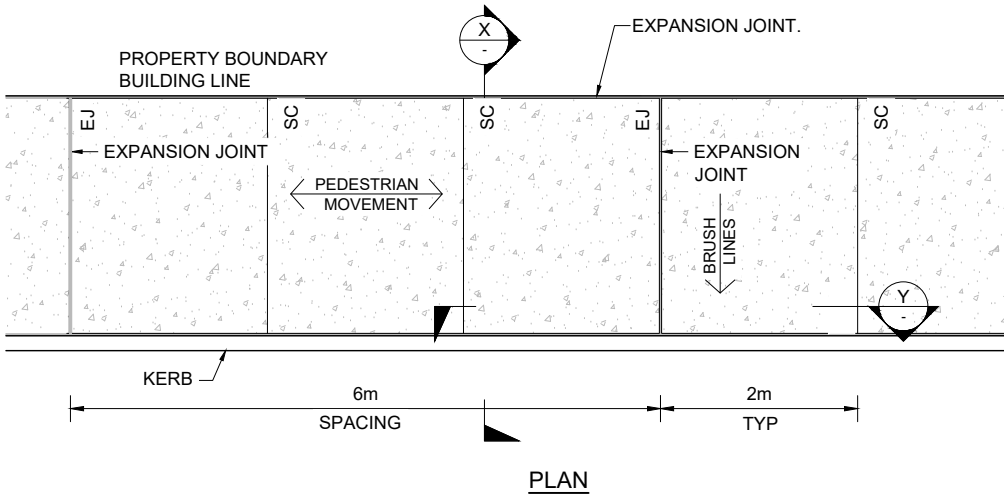


PLAN

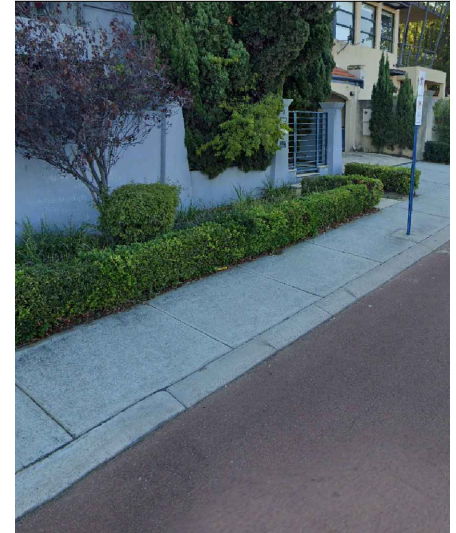


GENERAL NOTES:

- 100MM THICK CONCRETE TO ACHIEVE A MINIMUM 32MPA. A MINIMUM NOMINAL AGGREGATE OF 14MM AND SLUMP OF 80MM MAX. SLIP RESISTANCE TO COMPLY WITH AS4586 & AS3661. BROOM FINISH PERPENDICULAR TO THE DIRECTION OF PEDESTRIAN FLOW.
- SAW CUT JOINTS 5X40MM SAW CUTS FILL WITH APPROVED SEALANT TO MATCH SURROUND COLOUR.
- ALL TRANSVERSE EXPANSION JOINTS SHALL BE "ALL-IN ONE LOCK" & EXPANSION JOINT OR EQUIVALENT AT MAX SPACING OF 6M.
- ALL LONGITUDINAL EXPANSION JOINTS SHALL BE 75MM X 10MM 'ABELFLEX', BUTYL MASTIC SEALANT TO BE USED ON EXPANSION JOINTS. CITY SHOULD SPECIFY A COLOUR MATCH, WITH 'PAVELOCK' SAND OR SIMILAR APPROVED.

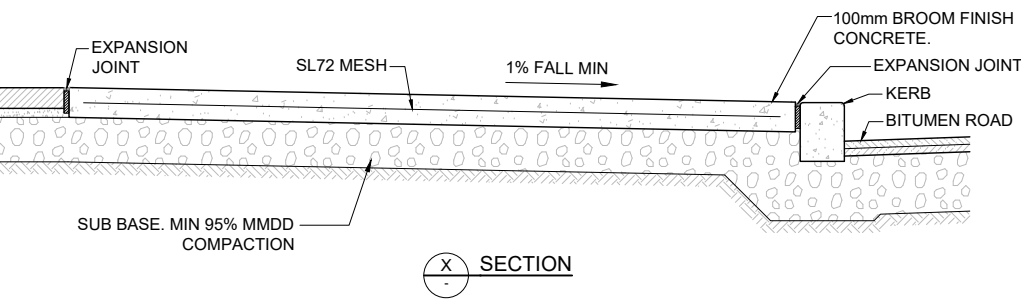

SECTION X

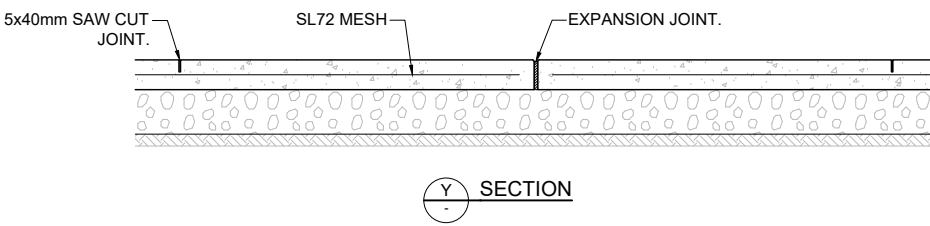

SECTION Y