


MEDIAN DESIGN



303.07

FOOTPATH AND PAVEMENT DESIGN

REVIEWED: 07.05.2024

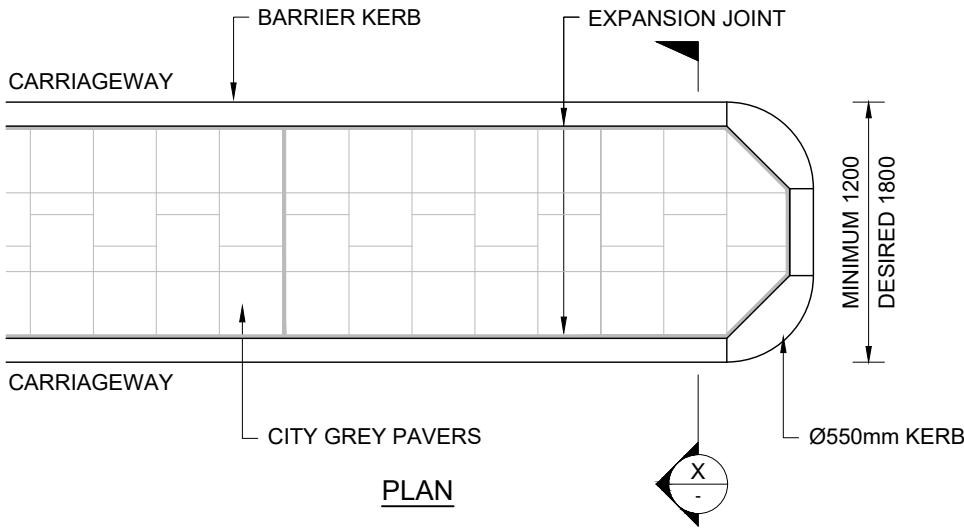

PLAN

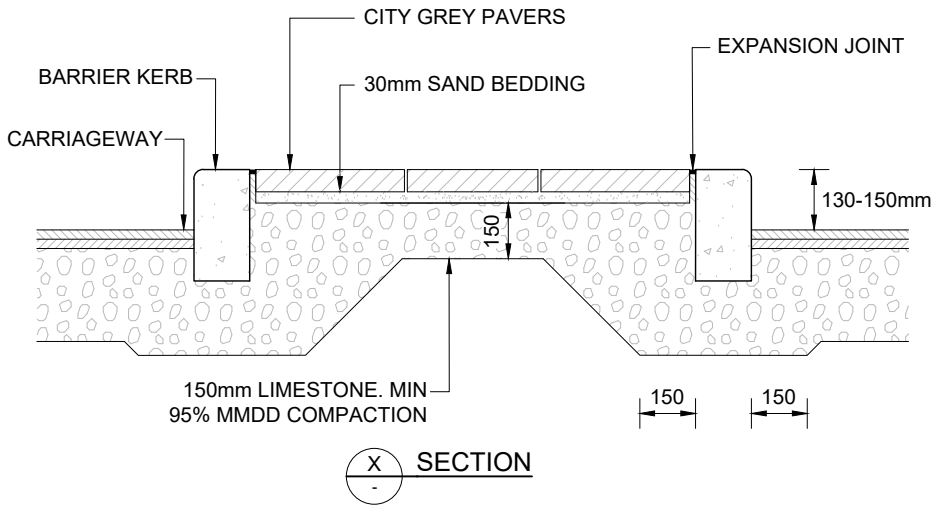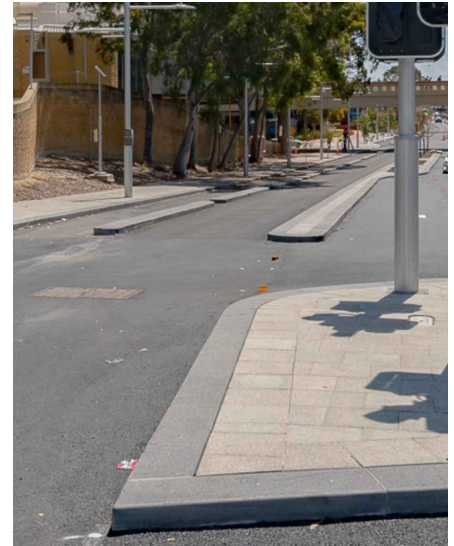

SECTION

GENERAL NOTES:

1. THE CITY GREY PAVING USED IN MEDIANS AND CROSS-OVERS ETC IS SUPPLIED BY *URBANSTONE* ARE: 400X400X60MM
2. LEAVE JOINTS OF 3-4MM BETWEEN THE SLABS AND FILL WITH 'PAVELOCK' SAND OR SIMILAR APPROVED.
3. PROVIDE EXPANSION JOINTS AT THE BACK OF KERBS AND AT EVERY 6 METRES.
4. ALL EXPANSION JOINTS SHALL BE 75MM X 10MM 'ABELFLEX', BUTYL MASTIC SEALANT TO BE USED ON EXPANSION JOINTS, CITY SHOULD SPECIFY A COLOUR MATCH OR SIMILAR APPROVED.
5. CONCRETE PAVERS SHOULD BE A MINIMUM OF 28 DAYS OLD, PRIOR TO LAYING.
6. 150MM MINIMUM OF COMPACTED LIMESTONE, WATERBOUND AND PLACED ON A COMPACTED SUB-GRADE, SHOULD BE PROVIDED AS BASE TO ALL FOOTPATHS.
7. REFER BOOK 400 FOR BARRIER KERB DETAILS.