





# SERVICE PIT COVERS IN CITY GREY PAVING

# 306.01


FOOTPATH AND PAVEMENT DESIGN

REVIEWED: 07.05.2024



Ø58 x 3mm  
STAINLESS STEEL  
PLATE.

6mm ARIAL TEXT  
ENGRAVED 1mm  
DEEP PREFERRED.

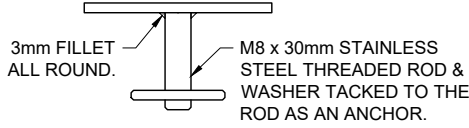

100mm<sup>2</sup> x 6mm  
CAST BRASS.

FOR THE CITY OF PERTH  
LOGO & TEXT ELECTRONIC  
INFORMATION CONTACT  
TUD.INBOX@CITYOFPERTH.WA.GOV.AU

SERVICE DESCRIPTION  
TEXT IS TO BE 6mm HIGH  
ARIAL TEXT 1mm DEEP.

GENERAL NOTES:


1. ANY FURTHER INFORMATION CAN BE OBTAINED FROM THE TRANSPORT AND URBAN DESIGN AT: TUD.INBOX@CITYOFPERTH.WA.GOV.AU

CITY OF PERTH 6mm CAST BRASS LOGO.

NOTE: LOGO INSERTS SUPPLIED BY CITY OF PERTH OR ALTERNATIVE SUPPLIER.

ADHESIVE FOR INSERTS: SIKA FLEX 252, OR EQUIVALENT.

SURFACE TO BE PREPARED WITH SIKA CLEANER 205 & SIKA PRIMER 210T OR EQUIVALENT.

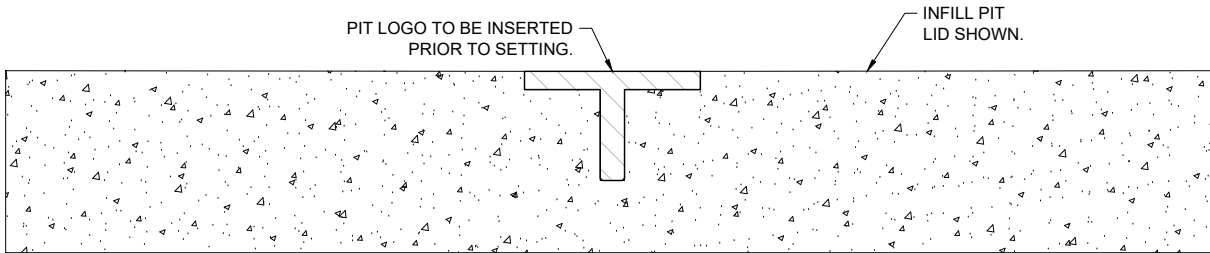

PIT LOGO IS TO BE INSTALLED INTO THE WET  
IN-SITU CONCRETE IN THE INFILL PIT LID.

DETAIL