


SECTION A
 NOTE: REFER TO PROJECT LAYOUT PLANS FOR SPECIFIC PLACEMENT OF FURNITURE.



- GENERAL NOTES:**
- CITY SEATS SHOULD BE LOCATED TO ENSURE THAT THE FIXING DOWN BOLTS ARE 50MM MINIMUM FROM JOINTS IN THE PAVING.
 - SEATS SHOULD BE POSITIONED EITHER PARALLEL OR AT RIGHT ANGLES TO THE STREET AXIS. IN ADDITION, SEATS SHOULD BE LOCATED:
 - * IN URBAN AREA
 - * WHERE THEY ARE NEEDED;
 - * WHERE THEY DO NOT BECOME OBSTRUCTIVE;
 - * IN THE SHADE;
 - * TO CREATE A SENSE OF SAFETY;
 - * TO PROVIDE A VIEW TOWARDS ACTIVITIES;
 - * A MINIMUM OF 600MM FROM THE FACE OF KERB.

THE FOOTING DESIGN IS ADEQUATE FOR ANY SITUATION WITH SUBGRADE SOIL THAT HAS A BEARING CAPACITY OF 50 KPA OR GREATER. SUBGRADE PREFERABLY IS A COMPACTED NATURAL MATERIAL OR COMPACTED SAND OR CRUSHED ROCK FILLING.

CITY OF PERTH SUPPLIER	
NAME/ COMPANY	DRAFFIN STREET FURNITURE
CONTACT DETAILS	EMAIL: info@draffin.com.au TEL: +61 3 9720 1033

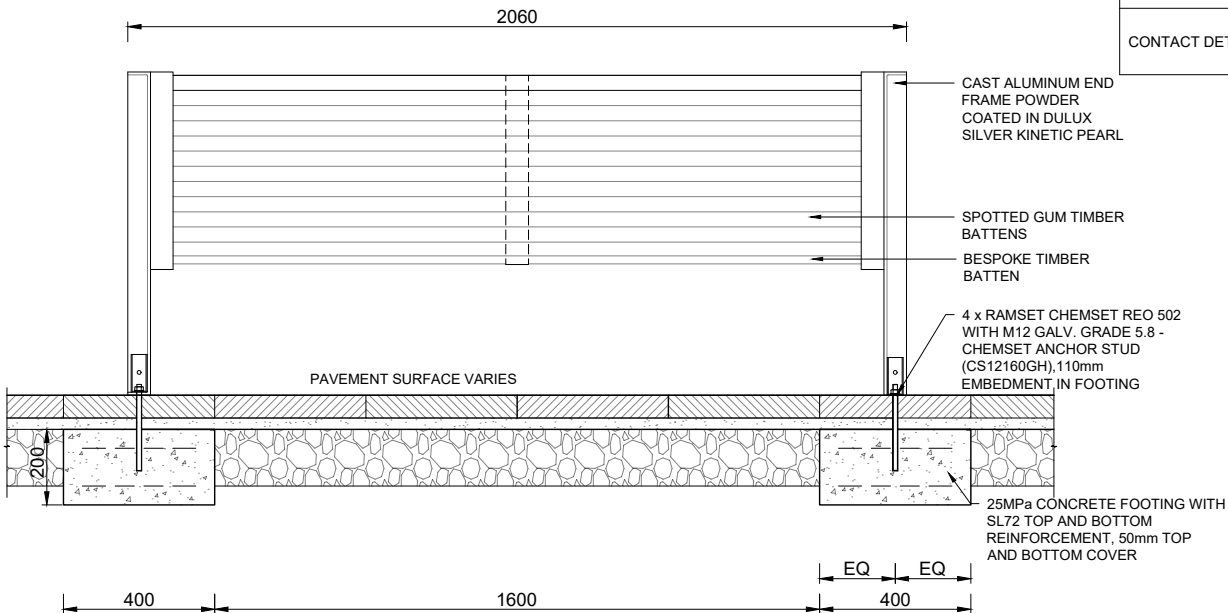

ELEVATION B